



Flow Solutions Division

BW Seals


Durametallic Seals

Pacific Wietz Seals

Pac-Seal

Allpac MP

Dual-inline, cartridge seal
for multiphase applications

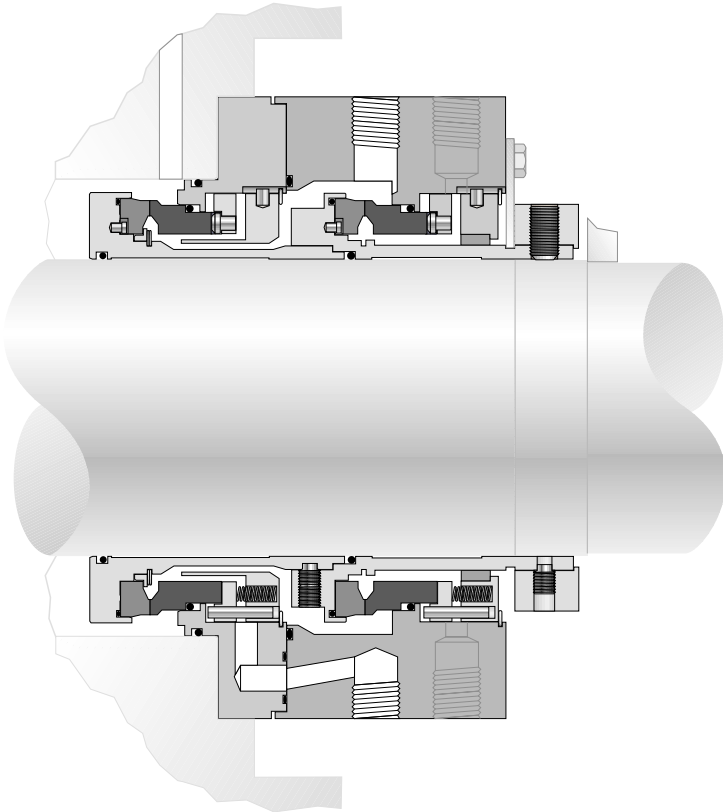

Installation Instructions

Introduction


The Allpac MP is a dual-inline, cartridge seal specifically designed for multiphase twin-screw pumps. Four mechanical seal assemblies are installed on one pump. Each seal is identical; they are designed to fit in any location on the pump.

1 Equipment Check

- 1.1 **Follow site safety regulations** prior to equipment disassembly.
 - Lock out motor and valves
 - Wear designated personal safety equipment
 - Relieve any pressure in the system
 - Consult site MSDS files for hazardous material regulations
- 1.2 **Disassemble equipment** to allow access to seal installation area.
- 1.3 **Remove all burrs** and sharp edges from the shaft or sleeve including sharp edges of keyways and threads. Replace shaft or sleeve if worn in the sleeve gasket area. Make sure the seal housing bore and face are clean and free of burrs.
- 1.4 **Check requirements** for shaft, sleeve, and seal housing, **see Figure 1**.

Seal Chamber Requirements

Figure 1

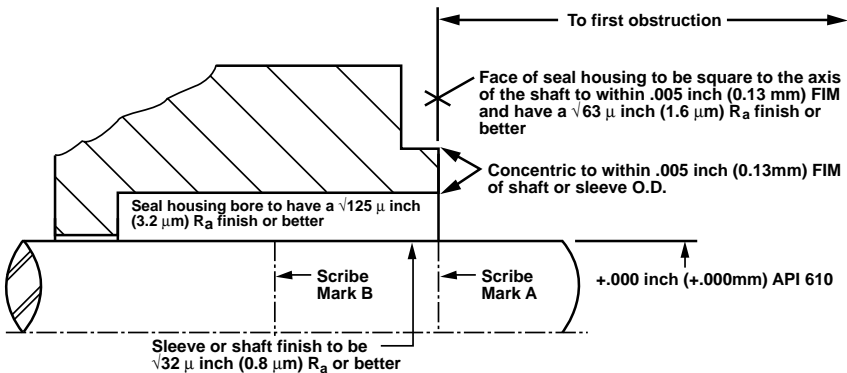

- Bearings must be in good condition.
 - Maximum lateral or axial movement of shaft (end play) = .010 inch (0.25mm) FIM
 - Maximum shaft runout at face of seal housing = .003 inch (0.07mm) FIM
 - Maximum dynamic shaft deflection at seal housing = .002 inch (0.05mm) FIM
- 1.5 **Check assembly drawing** included with the cartridge seal for materials of construction, dimensions, and piping connections.
 - 1.6 **Check shaft or sleeve O.D., box bore, and distance to the first obstruction** to ensure that they are dimensionally the same as shown on the seal assembly drawing.
 - 1.7 **Check gland pilot and bolt holes** to ensure they are adaptable to the equipment and are the same as shown on the assembly drawing.

- 1.8 Handle all seal parts with care, they are manufactured to precise tolerances. The contacting surfaces of the rotating and stationary seal faces must be treated with particular care. These two surfaces are lapped flat to within three helium light bands (34.8 millionths of an inch). **Keep the seal faces perfectly clean at all times.**

2 Allpac MP Seal Installation

- 2.1 **Lubricate the shaft** or sleeve lightly with silicone lubricant before installing any seal parts.
- 2.2 **Lubricate** the two sleeve gaskets before installing them in their grooves in the sleeves.
- 2.3 **Lubricate the flange gasket** before installing onto the pilot diameter on the seal cartridge.
- 2.4 **Back out the drive collar set screws** slightly so that no portion of them extends inward past the sleeve ID.
- 2.5 **Install the complete cartridge seal assembly** on the shaft and position it with the seal oriented toward the pump. If at any time the seal requires a significant amount of force to position correctly, **STOP, BACK UP**, and assess the situation.
- 2.6 **Position the cartridge flange** against the seal chamber face and **tighten the gland stud nuts** evenly in a star pattern. The nuts can be torqued using ordinary wrenching techniques.
- 2.7 **Adjust the bearings, coupling and pump rotating assembly** so that the shaft is in its operating axial position. Any subsequent axial adjustment of the shaft requires resetting of the seal.
- 2.8 **Tighten the drive collar set screws** to the value specified on the assembly drawing. Improper installation torque can damage the screws or shaft or result in lower axial thrust retention of the drive collar.
- 2.9 Loosen the setting plate fasteners and **slide the setting plates away from the drive collar** and sleeve as far as possible. Tighten the setting plate fasteners so that the setting plates do not come loose during operation.

3 Barrier System Piping

- 3.1 Each dual cartridge seal has **pipe ports labeled** as shown in the assembly drawing.
- 3.2 The Allpac MP seal is designed to be operated with the seal flush and support systems as defined on the assembly drawing.

4 Operation

- 4.1 During **the first hour of operation**, seal performance should be monitored very closely:
 - The temperature rise of the barrier fluid should be steady and should level out after an hour of operation. A quickly rising temperature or a temperature that does not seem to be leveling off signals a problem and should be thoroughly investigated.
 - A sudden rise or decrease in barrier fluid, or a significant color change of barrier fluid signals off-design leakage and should be thoroughly investigated.

- A leakage rate of more than 30 drops per minute of the outboard seal signals off-design leakage and should be thoroughly investigated.
- Excessive vibration of the pump should be investigated immediately.

5 Repairs

This product is a precision sealing device. The design and dimension tolerances are critical to seal performance. Only parts supplied by Flowserve shall be used to repair the seal. These are available from numerous Flowserve stocking locations. To order replacement parts, refer to the part number, material code and description listed on the assembly drawing.

Decontaminate the seal assembly and return it to Flowserve with an order marked **“Repair or Replace.” A signed certificate of decontamination** must be attached. **A Material Safety Data Sheet (MSDS) must be enclosed** for any product that came in contact with the seal. The seal assembly will be inspected and, if repairable, it will be rebuilt, tested and returned in its original condition.

All Flowserve Corporation, Flow Solutions Division, products must be installed in accordance with Flowserve installation instructions. Failing to do so or attempting to change or modify Flowserve products will void Flowserve's limited warranty. Flowserve's limited warranty is described fully in Flowserve's Standard Terms and Conditions of Sale. Flowserve makes no warranty of merchantability or fitness for a particular purpose and in no event shall Flowserve be liable for consequential or incidental damages.

Flowserve Corporation

Flow Solutions Division

Primary Worldwide Flow Solutions Division Locations

Licensees, authorized agents, and affiliated companies located worldwide

United States		Canada		Netherlands		Argentina		Australia	
Kalamazoo, MI Phone 269-381-2650 Fax 269-381-8368	Edmonton, Alberta Phone 780-463-7958 Fax 780-450-1241	Scarborough, Ontario Phone 416-292-2877 Fax 416-292-5190	Rosendaal Phone 31-165-581400 Fax 31-165-552622	Villa Martelli Phone 54-11-4709-6800 Fax 54-11-4709-7072	Marayong NSW Phone 61-2-8822-7100 Fax 61-2-9679-7511				
Singapore		Mexico		Brazil		Japan		Germany	
Phone 65-746-4318 Fax 65-747-1963	Tlaxcala Phone 52-2-461-6791 Fax 52-2-461-6847	Sao Paulo Phone 55-11-4066-8600 Fax 55-11-4066-7014	Osaka Phone 81-720-85-5571 Fax 81-720-85-5575	Dortmund Phone 49-231-6964-0 Fax 49-231-6964-248					

www.flowserve.com

Printed in U.S.A.

ISO 9000
Certified

FIS156
ORG 07/02 USA