

# ***Kämmer® Series 080000*** *Low Flow Valve*




## ***Kammer Series 080000***


### Description

Kammer series 080000/081000 low flow laboratory valves are designed for precision controlling. The body is manufactured from bar stock stainless steel and is easily adapted to meet application requirements. Together with the series 1 actuator it forms an extremely compact control valve.

On request a special calculating programme is available to define the  $C_{vs}$ -values and the actual rangeability.

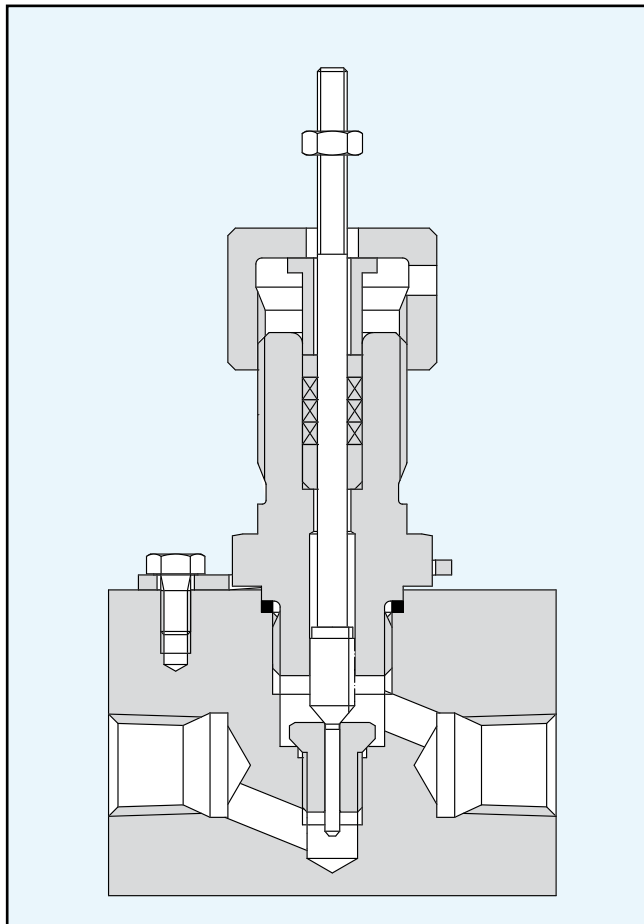

Globe valve

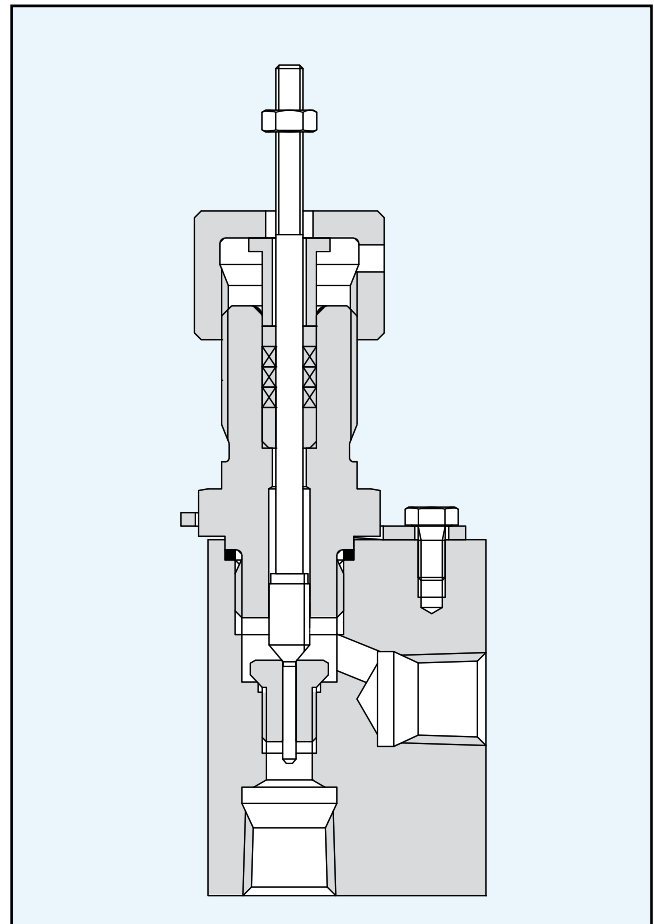

Angle valve


## Kammer Series 080000

### Technical Data


<b>Valve body style</b>	Globe valve, angle valve
<b>Characteristics</b>	Equal%, Linear, On-Off
<b>Seat leakage</b>	≤ 0.01% of rated C <sub>vs</sub> ( ANSI Class IV).
<b>Valve plug and Seat ring</b>	See table page 6
<b>Packing</b>	PTFE for temperatures up to 200 °C (392 °F) Grafoil for temperatures above 200 °C (392 °F) PTFE packing for oxygen service Packing according to German clean air act
<b>Body gasket</b>	316 stainless steel or as body material
<b>Extensions</b>	Standard, normalizing fins, bellows seal
<b>C<sub>vs</sub>-values</b>	See table page 6
<b>Connections</b>	G ¼" or NPT ¼" internal thread. Other connections on request.
<b>Valve body</b>	316 stainless steel, Hastelloy B/C, Nickel, Monel, Titanium optional.

***Kammer Series 080000***

Designs

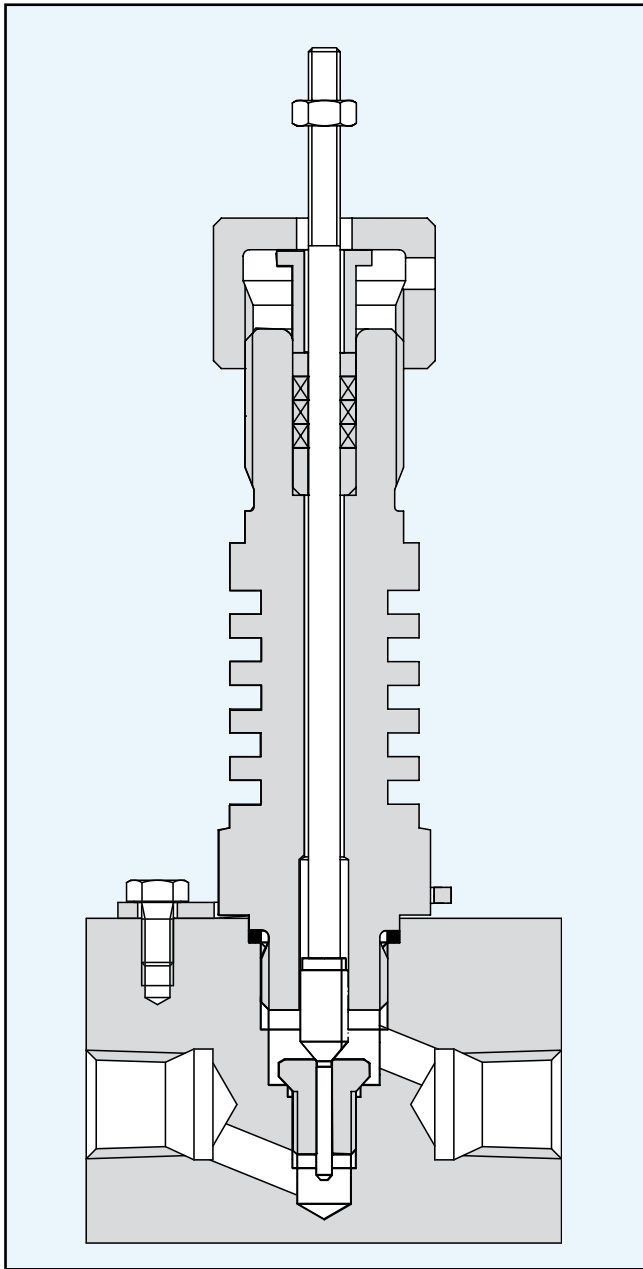


Valve with normalising fins

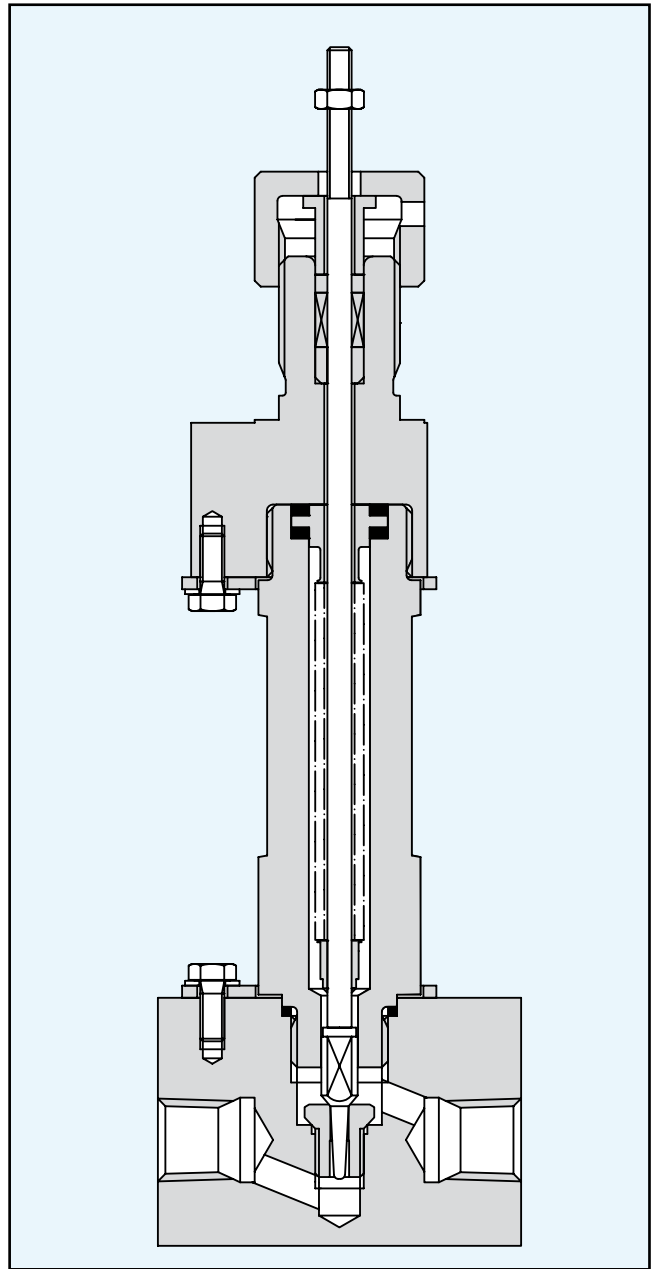

Valve with bellows seal


## Kammer Series 080000

Dimensions mm (in.) and Weights kg (lb.)

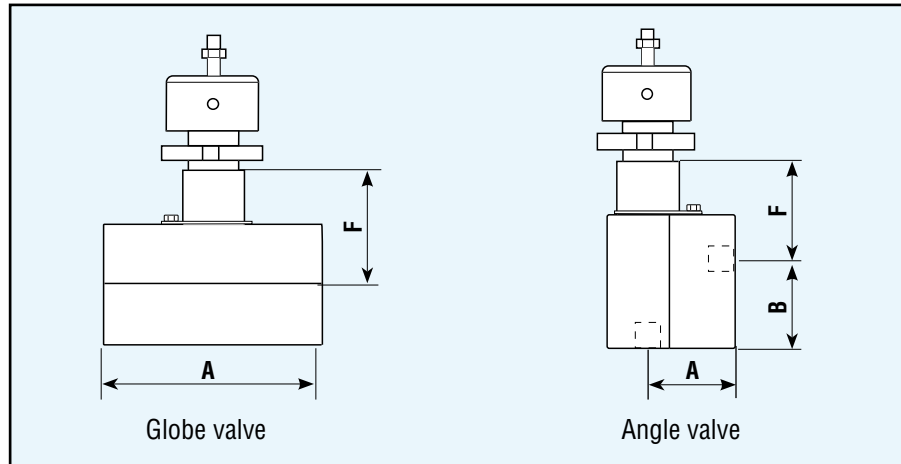

Globe valve Length Internal thread	Angle valve Length Internal thread		Dimension F			Weight		
	A	A	Standard	Fins	Bellows	Standard	Fins	Bellows
A	A	B						
60 (2.4)	29 (1.1)	29 (1.1)	30 (1.2)	70 (2.6)	120 (4.7)	0.7 (1.5)	0.8 (1.8)	1.0 (2.2)

## Valve Code

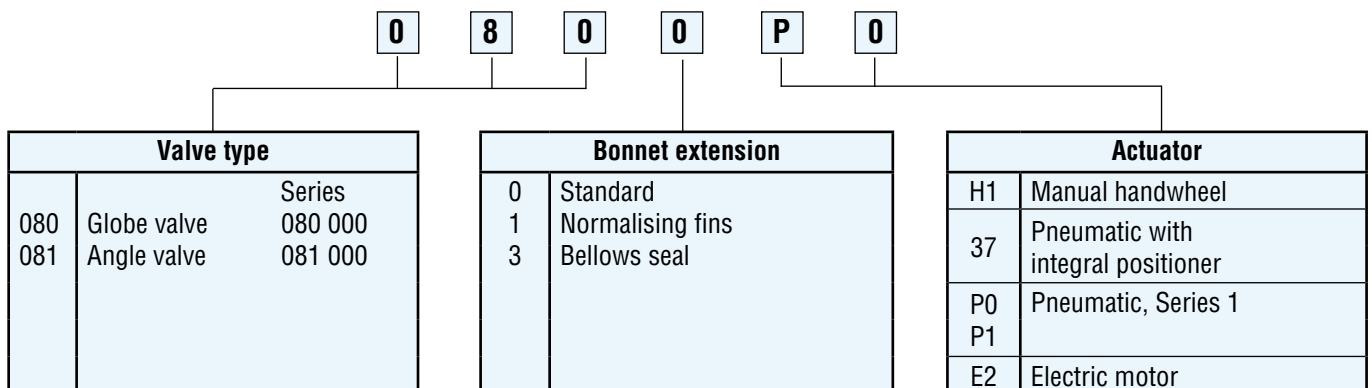

## Kammer Series 080000

### Standard C<sub>vs</sub> Values

C <sub>vs</sub> Value ( turbulent)	Stroke mm (in.)	Stem diameter mm (in.)	Seat diameter mm (in.)	Rangeability*	Standard plug material	Standard seat material	Characteristic Linear	Characteristic equal%	Alternative materials for seat/plug	
									Tungsten carbide; Hastelloy C	Nickel; Monel; Titanium; Alloy 6
0.00063	10 (0.39)	4 (0.16)	2 (0.08)	25:1	Alloy 6	1.4122		X		
0.00079								X		
0.00098								X		
0.0012								X		
0.0015								X		
0.0019	10 (0.39)	4 (0.16)	2 (0.08)	25:1	Alloy 6	1.4122		X		
0.0023								X		
0.0029								X		
0.0036								X		
0.0045								X		
0.0056	10 (0.39)	4 (0.16)	2 (0.08)	25:1	Alloy 6	1.4122		X	X	
0.0075								X	X	
0.0098								X	X	
0.013								X	X	
0.017								X	X	
0.022	10 (0.39)	4 (0.16)	2 (0.08)	25:1	Alloy 6	1.4122		X	X	
0.029								X	X	
0.038								X	X	
0.054								X	X	
0.079								X	X	
0.013	10 (0.39)	4 (0.16)	3 (0.12)	50:1	Alloy 6	316	X	X	X	X
0.020							X	X	X	X
0.029							X	X	X	X
0.047							X	X	X	X
0.074							X	X	X	X
0.12	10 (0.39)	4 (0.16)	3 (0.12)	50:1	316	316	X	X	X	X
0.19							X	X	X	X
0.29							X	X	X	X

\* For calibration conditions

## Other Kämmer Low Flow Valves



### **Kammer micro-flow series 030000**

Kämmer series 030000 ½" low flow valves are designed for precision controlling up to PN40. The body is a precision casting for high finishing accuracy. Together with the series 1 actuator it forms a compact control valve. Upon request a special calculating programme is available to define the  $K_{vs}$ -values and the actual rangeability.



### **Kammer Laboratory valves series 185000/187000**

Kämmer microflow series 185000 and 187000 are ½" laboratory valves designed for precision controlling. The bodies in stainless steel and C-steel are manufactured from forged material, the bodies for all other special materials are manufactured from bar stock. The bodies are, therefore, easy to adapt for application requirements. Together with the series 1 or 2 actuators they form a compact control valve. Upon request a special calculating programme is available to define the  $K_{vs}$  values and the actual rangeability.



Your contact:



FCD KMENBR8020-00 08/08

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2000 Flowserve Corporation, Irving, Texas, USA. Flowserve is a registered trademark of Flowserve Corporation.

## Worldwide Regional Headquarters

### Flowserve Corporation

Flow Control  
1350 N. Mt. Springs Parkway  
Springville, UT 84663  
USA  
Phone: +1 801 489 8611  
Fax: +1 801 489 3719

### Flowserve (Austria) GmbH

Control Valves - Villach Operation  
Kasernengasse 6  
9500 Villach  
Austria  
Phone: +43 (0)4242 41181 0  
Fax: +43 (0)4242 41181 50

### Flowserve India Controls Pvt. Ltd

Plot # 4, 1A, E.P.I.P, Whitefield  
Bangalore Karnataka  
India 560 066  
Phone: +91 80 284 10 289  
Fax: +91 80 284 10 286

### Kammer Products

Europe, Middle East, Africa, Asia, Pacific

### Flowserve Essen GmbH

Manderscheidstr. 19  
45141 Essen  
Germany  
Phone: +49 (0)201 8919 5  
Fax: +49 (0)201 8919 662

### Kammer Products

Americas

### Flowserve (FCD) Kammer Valves INC.

1300 Parkway View Drive  
Pittsburgh, Pa 15205  
USA  
Tel.: +1 412 787 8803  
Fax: +1 412 787 1944