

Airfin Coolers provide a reliable way to reduce the operating temperature of a mechanical seal without the added cost of cooling water.



Airfin Coolers from Flowserve are easy to install and clean, and have lower maintenance and operating costs. Available in natural-convection and forced-air designs, Airfin Coolers use atmospheric air as the coolant, eliminating the need for cooling water. They are constructed with corrosion-resistant materials for use in most chemical services.

Features and benefits

- Lower operating costs with finned-tube air-cooling technology that eliminates water treatment and disposal
- Improve reliability with water-free cooling design, which prevents accidental shutoff and winter freeze-up
- Minimize installation and maintenance costs with unit design that requires less piping and is not as susceptible to fouling

Three models available

- 625 NC — Natural convection model
 - Code WCA14640733
- 625 FC Electric Motor — Forced convection model with 0.25 kW (1/3 hp) electric motor
 - One-phase motor: Code WCA18856933
 - Three-phase motor: Code WCA14020233
- 625 FC Air Motor — Forced convection model with 0.25 kW (1/3 hp) motor with 4.1 bar (60 psi) air
 - Code WCA26748333

Operating parameters

Maximum tube side pressure ratings

	35°C (100°F)	95°C (200°F)	150°C (300°F)	205°C (400°F)	315°C (600°F)	425°C (800°F)
psig	2300	2050	1800	1650	1400	1200
barg	160	140	125	115	95	80

- Temperature to: 425°C (800°F)
- Effective cooling area: 2.5 m² (26.8 ft²)

Materials of construction

- Tube: 304 stainless steel
- Fins: Carbon steel
- Frame: Painted carbon steel with protective shroud
- Blower: Galvanized steel
- Connections: 316 stainless steel, 0.500 NPT female


Performance curves

There are two (2) curves for each model of Airfin Cooler: one for heat transfer fluids and one for water. Select the applicable performance curve* for your operating conditions.




Example: Model 625 FC, Heat Transfer Fluid at 1750 rpm

- Step 1:** Enter the graph on the horizontal axis at the "Temperature of the Product Entering Cooler: assume 200°C (400°F).
- Step 2:** Move vertically until you intersect the curve for the desired "Temperature of the Product Exiting the Cooler"; assume to be 120°C (250°F).
- Step 3:** Move horizontally toward the vertical axis, "Product Flow Rate". The maximum product flow rate is 3.8 Lpm (1 gpm). Size and install an orifice to control the rate of flow.

Model 625 FC

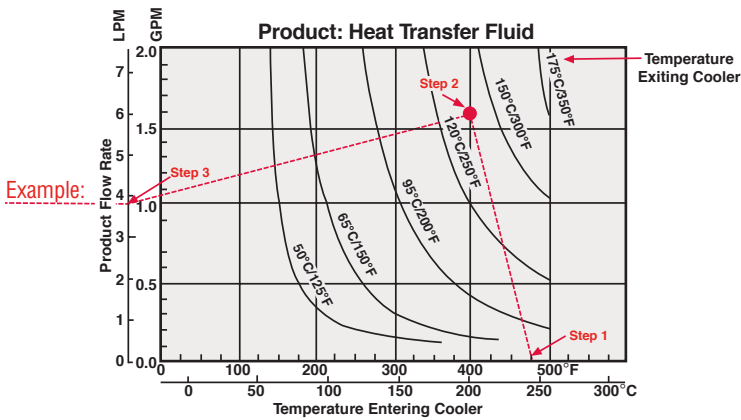

Model 625 NC

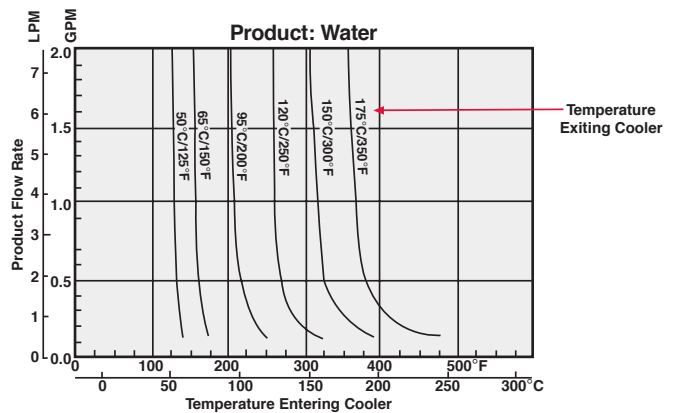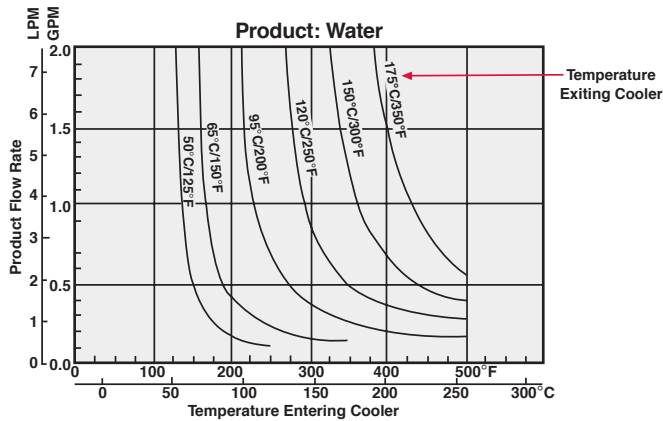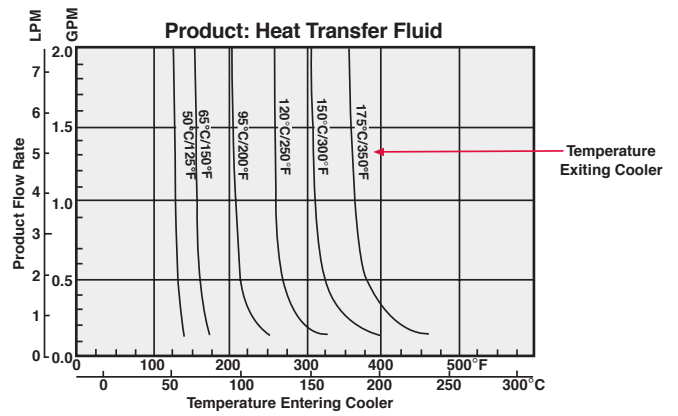

*Curves are based on 35°C (100°F) ambient temperature. If the product inlet or ambient temperature exceeds those shown on the graph, please contact your Flowserve representative.

FSD197a (E/AQ) May 2019

Headquarters

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: +1 937 890 5839

USA and Canada

Kalamazoo, Michigan USA
Telephone: +1 269 381 2650

Europe, Middle East, Africa

Etten-Leur, The Netherlands
Telephone: +31 765 028 200

Asia Pacific

Singapore
Telephone: +65 6544 6800

Latin America

Mexico City
Telephone: +52 55 5567 7170

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2019 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.